

Articles in this section

[Pro-J Spec Sheet](#)


Pro-J Spec Sheet

4 years ago

PRO-J **COMMERCIAL / INDUSTRIAL CONTINUOUS DUTY BELT DRIVE JACKSHAFT**
Designed for use on commercial / industrial sectional doors with high or vertical lift track and small rolling grilles

STANDARD FEATURES

- **2 year Warranty**
- 24V class 2 control circuit with 40VA transformer to protect against short circuit
- On board receiver with antenna
- External radio control terminal strip
- Low friction powder metal limit cam nuts with fully adjustable rotary type limit switch assembly
- Three button open-close-stop control station Nema-1
- Continuous duty industrial motor with overload protection
- Motor removable without affecting limit settings
- Heavy duty SL V-belt
- #41 roller chain & sprockets on all internal drives
- Adjustable friction clutch
- Mechanical brake system
- Solenoid brake (optional PRO-JB) recommended for large doors
- #50 roller chain and sprockets on final drive
- 3/4" permanently lubricated & sealed precision ball bearings on pulley shaft
- 1" permanently lubricated & sealed ball bearings on final drive shaft
- Emergency disconnect with electrical cut-out switch for manual operation
- Chain keeper
- Left or right hand mounting
- Baked on dark grey coat finish
- Shipping weight 95 lbs
- N-1 photocells included for doors up to 24' wide




When ordering a PRO-J operator, supply Nice with the following information:


- Door height
- Door width
- Type of door
- Horsepower
- Voltage/ Phase
- Safety devices
- Door shaft diameter & door shaft key size
- Mounting (LH or RH, Bracket or Wall mount)
- Control circuit options (see page 5-6)







WALL MOUNT

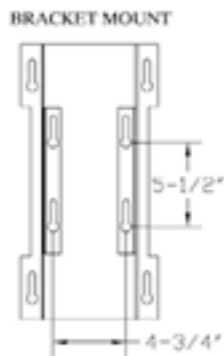

BRACKET MOUNT

montreal | phoenix | atlanta | chicago

1 (877) 888 1116


[Nice_Spec-Sheet_PRO-J.pdf](#)

800 KB · Download

Recently viewed articles

[Pro-LJ Spec Sheet](#)
[Door Product Spotlight](#)
[Nice Commercial Operator Brochure](#)

Related articles

[Pro-J Instruction Manual - English](#)
[Pro-J Shop Drawing](#)
[Pro-H Spec Sheet](#)
[Pro-LJ Spec Sheet](#)
[Pro-EJ Architectural Specifications](#)